

# Energy Resolution of the Solar Neutron Detector of JEM on ISS

K. Koga, T. Goka, H. Matsumoto and Y. Muraki<sup>1)</sup>

**Abstract**—A solar neutron detector will be launched on the Japan Exposure Module (JEM) of the International Space Station (ISS) in May 2009. The detector comprises scintillation fiber and is designated as the Space Environment Data Acquisition (SEDA)-FIB. It tracks the recoil protons induced by neutrons and measurement of the proton energy using the range method. The energy resolution of the detector was measured using the proton beam at Riken. Herein, we report the FIB detector energy resolution.

## 1. INTRODUCTION

Measurement of the radiation effects imparted to astronauts on the space station is an important task for the International Space Station (ISS) mission. Numerous high-energy protons are produced at the solar surface when a huge solar flare occurs. They arrive at the ISS a few hours later. These protons pose a strong radiation hazard not only to the astronauts but also to the electronic devices onboard the ISS. An early prediction of the arrival of the Solar Energetic Particles (SEPs) is expected to minimize such radiation hazards. For realization of such a forecast, a new type of solar neutron detector is proposed for mounting on the ISS. In April 1979, the plan was accepted by the Space Development Committee of the Ministry of Science of Japan as a JEM payload [1].

The new neutron detector can measure the neutron energy; it can also detect the direction of the neutrons' arrival. Those functions are very important not only to identify when solar neutrons depart from the Sun but also to assess radiation hazards for human bodies and radiation damage to electronics. These new functions will enable more precise understanding not only of the production mechanisms of the Solar Energetic Particles (SEPs) at the Sun surface, but also the radiation effects imparted by them. We can determine whether they are produced indirectly by the wall of ISS or directly by solar neutrons.

## 2. NEW SOLAR NEUTRON DETECTOR

The new neutron detector can measure the energy of solar neutrons and the Albedo neutrons from the Earth. The detector comprises fine blocks of the scintillation plates; the neutron tracks are identifiable as the tracks of protons that are produced through n-p interaction processes in the scintillator plates. The arrival direction and the track length of protons are detected by two multi-anode photomultipliers (H4140-20; Hamamatsu Photonics K.K.) looking perpendicularly from the X direction and Y direction (Fig. 1). Thereby, the detector can identify the arrival direction of neutrons with accuracy of  $\pm(1.8-45)$  deg, depending on the track length. Consequently, we can identify whether those neutrons have come from the Sun or the Earth or from the wall of the ISS because the direction of the Sun is measured using a position sensor onboard the ISS. The neutrons' energy can be estimated by measuring the range of protons. The neutron detector designated as FIB in SEDA can measure the energy of neutrons between 30 MeV and 100 MeV.

Simultaneously, the Bonar Ball Detector (BBD) will measure neutrons with energies in the range of (0.03 eV–15 MeV) in SEDA. The BBD detector cannot identify the neutrons' direction of arrival. The operational principle of the BBD is the same as the neutron monitors that are used throughout the world to measure the long-term modulation of cosmic ray intensity, but the detector is small.

The FIB and the BBD detectors are mounted in a large box called the Space Environment Data Acquisition equipment-Attached Payload (SEDA-AP), which weighs 450 kg. It will be launched on the Japan Exposure Module (JEM) of the ISS on 15 May 2009 by the Atlantis space shuttle. Details of the FIB detector onboard the SEDA-AP are available elsewhere [2–6].

## 3. ENERGY RESOLUTION OF FIB DETECTOR

The energy resolution of the FIB detector was obtained using the proton beam at Riken. A 160 MeV proton beam was bombarded in front of the FIB. Different proton energy was realized to install aluminum plates of various thicknesses. The energy radiated on the FIB detector is respectively equivalent to the energy of 27 MeV, 44 MeV, 68 MeV, and 102 MeV. The range of tracks was scanned visually to obtain the range distribution. We have inferred that the mean value of the range corresponds to the incident proton energy, but the distribution from the mean value corresponds to the detector's energy

Space Environment Group, JAXA, Tsukuba, 305-8505, Japan  
(e-mail: Koga.Kiyokazu@jaxa.jp)

<sup>1)</sup>Department of Physics, Konan University, Kobe 658-8501, Japan  
(e-mail: muraki@konan-u.ac.jp).

resolution. Consequently, the energy resolution was obtained. The results are presented in Fig. 2. Fitting the data to a function of  $1/E$ , we obtained the energy resolution of the FIB to the proton tracks as  $\Delta E/E = 10\% / (E/50 \text{ MeV})$ .

However, when the number of trigger events for neutrons increases to more than 16 Hz, the FIB detector cannot record the pattern of the event because the transmission rate is limited by the baud rate of the communication between the ISS and the ground-based station. In this case, they can measure the number of layers, i.e., the range of charged particles. Furthermore, in case the trigger rate exceeds 64 Hz, the total deposited energy will be measured merely using use of the mesh type dynode of the multi-anode photomultipliers. At this time, the energy resolution is not as good as that of the range method: it is  $\Delta E/E = 40\%$ , being independent from energy.

#### 4. EXPECTED TRIGGER RATE FOR LARGE SOLAR FLARES

The FIB will record various data. The main sensor is cubic:  $10 \text{ cm} \times 10 \text{ cm} \times 10 \text{ cm}$ . The main sensor is covered by six plates of the plastic scintillator, which have a role of the anti-counter. Therefore, when high-energy neutrons enter into the sensor and produce high-energy protons, the high-energy protons penetrate the main sensor and arrive at the anti-counter. Using the anti-counter, such high-energy neutrons are not recorded. We can remove the bottom side anti-counter using communications from the ground, but it depends on the trigger rate by the backside particles. Detection of high-energy solar neutrons with energies  $>100 \text{ MeV}$  is made using ground-based neutron detectors.

The onboard detectors of the ISS can record solar neutrons with energy of less than  $100 \text{ MeV}$ . The delay time of solar neutrons with energy of  $100 \text{ MeV}$  is 11 min later than the light if solar neutrons are produced instantaneously at the Sun by the solar flare. According to our estimation [4], the expected flux of solar neutrons for gigantic solar flares, e.g. the 4 June 1991 event, is 15 Hz for  $100 \text{ MeV}$ . Here we have estimated the detection efficiency of neutrons by the FIB as 10%. Therefore, we will be able to record the pattern of events with energy ranges of between  $40\text{--}100 \text{ MeV}$  using the FIB detector for smaller solar flares such as X=1. This limitation is imposed merely by the available memory on the FIB.

The FIB detector can only record the total energy of the events if the trigger rate becomes greater than 64 Hz. Such a situation is expected to occur for neutrons with energy of less than  $60 \text{ MeV}$  for the largest solar flares. The expected background level is 1.5 Hz above the middle latitude and 0.2 Hz above the equator. They are produced by albedo neutrons, so-called cosmic ray albedo neutrons, induced by collisions of the galactic cosmic rays with the nucleus of the upper atmosphere.

#### ACKNOWLEDGMENTS

The authors thank Mr. N. Mochizuki for Flight Module data analysis.

#### REFERENCES

- [1] Minutes of the 12<sup>th</sup> Space Development Committee of the Ministry of Education, Science and Culture chaired by the Minister of Education, Science and Culture R. Chikaoka. Report Nos. 13-1 and 12-3. The Committee met on 9 April, 1997.
- [2] K. Koga et al., Radiation Measurement, 33 (2001) 287.
- [3] H. Matsumoto et al., Radiation Measurement, 33 (2001) 321.
- [4] I. Imaida et al., Nucl. Inst. Meth. A421 (1999) 99.
- [5] Y. Muraki et al., Proceed. 25th ICRC (Durban), 1 (1997) 41.
- [6] See further details: [http://kibo.jaxa.jp/en/experiment/ef/seda\\_ap/](http://kibo.jaxa.jp/en/experiment/ef/seda_ap/)

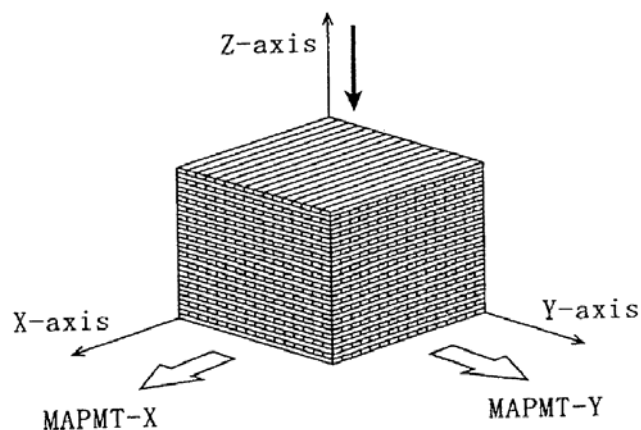


Figure 1. Schematic view of the neutron detector sensor. It comprises scintillation plates of  $3 \text{ mm} \times 6 \text{ mm} \times 96 \text{ mm}$ . The signal from each plate is read out by the multi-anode photomultiplier. The track pattern can be recognized using 512 data points. The total weight of the FIB detector is about 20 kg, except the interface part.

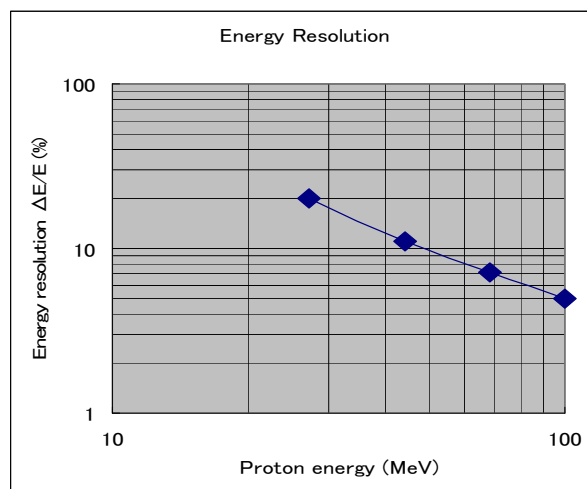


Figure 2. The energy resolution of the neutron detector obtained using the range method is shown as a function of the energy of incoming protons. The energy resolution can be well fitted to a function of  $\Delta E/E = 10\% / (E/50 \text{ MeV})$ .